

Rubber flexible joint Exposure type drainage joint

# DOLENEX

Exposed type rubber drainage joint with easy installation



## Feature


### Easy installation

Light weight, and easy installation by inserting the pipe and fastening by band.

### Inside flat type

No concern of sewage deposit because of smooth internal surface.


## Structure

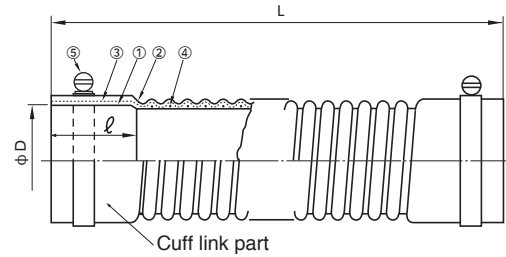

No.	Parts	Material	No.	Parts	Material
①	Inner Rubber	CR	④	Steel wire	SWM
②	Outer Rubber	CR	⑤	Flat band	SUS
③	Reinforcing cord	Special fiber			

● For each end of 40mm to 80mm, one band ⑤ is attached, and for 100mm to 200mm, two bands ⑤ are attached.

## Operating Conditions and Performance

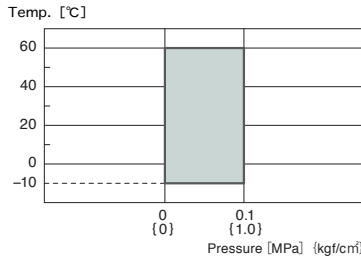

● Use after confirmation that the maximum operation pressure and maximum service temperature are within the operation range.

## Dimensions and Allowable Movements

※   Make-to-order products

Nominal Dia.		Dimension [mm]		Allowable eccentricity magnitude [mm]													
mm	inch	φD	ℓ	300L	400L	500L	600L	700L	800L	900L	1000L	1100L	1200L	1300L	1400L	1500L	2000L
40	1 1/2	48.6	50	15	20	25	30	35	45	55	65	75	90	105	120	135	200
50	2	60.5	50	15	20	25	30	35	45	55	65	75	90	105	120	135	200
65	2 1/2	76.3	80	10	15	20	30	35	45	55	65	75	90	105	120	135	200
80	3	89.1	80	10	15	20	30	35	45	55	65	75	90	105	120	135	200
100	4	114.3	100	—	10	15	25	35	40	45	50	70	85	100	115	130	190
125	5	139.8	100	—	10	15	25	30	40	45	50	65	80	95	110	125	180
150	6	165.2	150	—	—	10	20	30	35	45	50	60	70	80	90	100	165
200	8	216.3	200	—	—	—	20	25	35	40	50	60	70	80	90	100	150



This brochure may be revised without prior notice. We apologize in advance for any inconvenience this may cause.

Agent

**TOZEN Corporation**  
8-4, Asahi, Yoshikawa  
Saitama 342-0008 Japan